



**SR 111 (EDGEWOOD AVE)  
NEW KINGS RD to MONCRIEF CREEK**  
(Financial Project ID: 437616-1)  
**DUVAL COUNTY**

**Total Construction Cost**


**\$6.4 Million**

**Construction Begins**

**Fall 2018**



# SR 111 (EDGEWOOD AVE) NEW KINGS RD to MONCRIEF CREEK

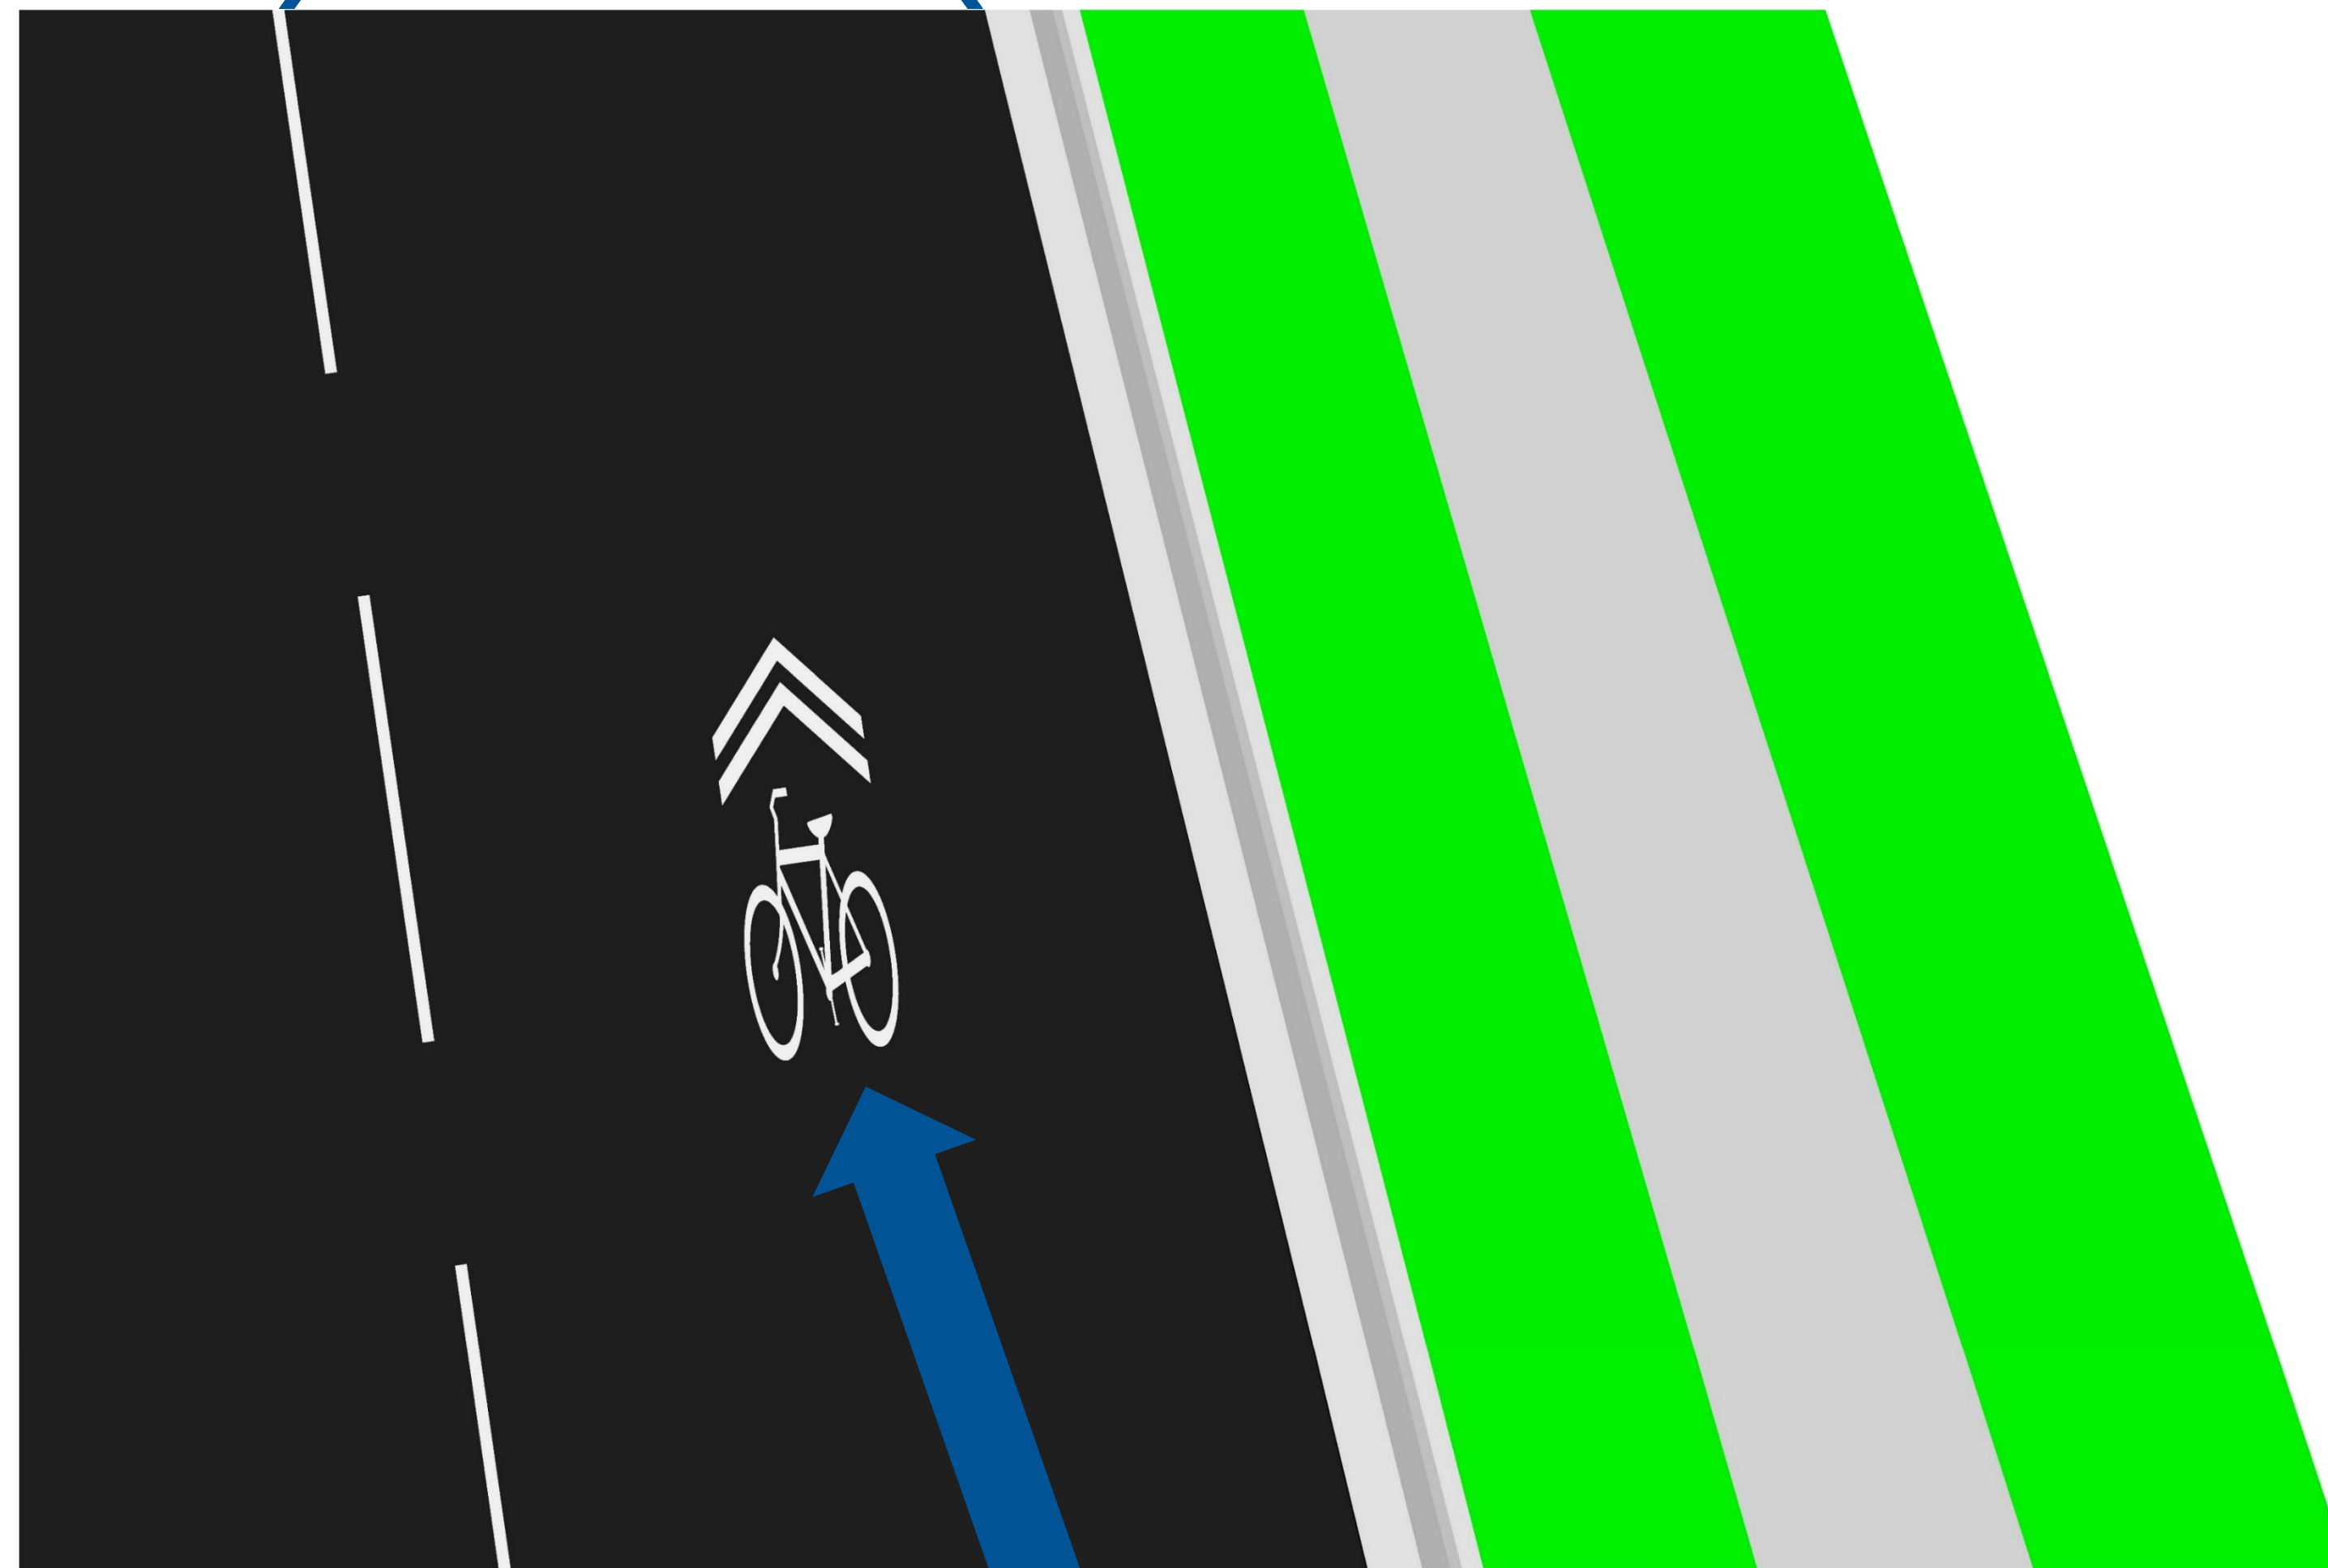

## Shared Lane Markings (Sharrows)

Shared Lane Markings will be placed in the wide curb lane to increase awareness of bicyclists. They also help to discourage wrong way riding and encourage safer passing of bicyclists by motorists.

## Wide Curb Lane

Wide curb lanes are through lanes which provide a minimum of 14 feet in width, which allows most motor vehicles to pass cyclists safely within the travel lane.



A driver overtaking a bicycle must maintain a horizontal clearance of at least 3 feet between the car and bicycle. Wide Curb Lanes will help accommodate this situation.