



DISTRICT TWO

Atlantic Boulevard (State Road 10) at 3rd Street (State Road A1A)

Neptune Beach, Duval County, Florida

FIN 441194-1, 443553-1


CONSTRUCTION OPEN HOUSE

**Tuesday,
November 16, 2021
4:30 to 6:30 p.m.**

Beaches
Branch Library
600 3rd Street
Neptune Beach, FL 32266

Online:
nflroads.com/VPH

By phone:
(631) 992-3221, access
code 456-119-701

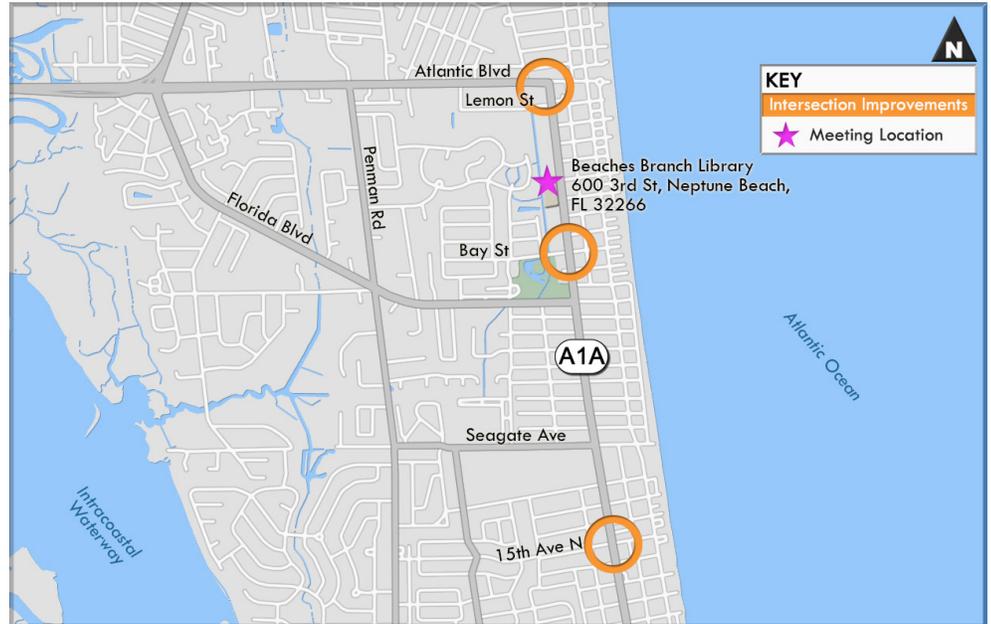

ABOUT THE PROJECTS

Improvements at the intersection of Atlantic Boulevard and 3rd Street include:

- Milling, resurfacing and restriping approximately 900 feet of pavement through the intersection.
- Lengthening the existing raised median on 3rd Street to eliminate the southbound 3rd Street to eastbound Lemon Street left turn movement.
- Making the inside two lanes of northbound 3rd Street left turn only, with the option to turn right or proceed straight through the intersection from the outside lane.
- Adding a raised lane divider to southbound 3rd Street to provide a crosswalk refuge point for pedestrians crossing 3rd Street.
- Widening the right turn from eastbound Atlantic Boulevard to southbound 3rd Street to prevent

vehicles pulling trailers from encroaching on the sidewalk/pedestrian landing.

- Installing new pedestrian lighting at the northeast, southeast and southwest corners of the intersection.

Pedestrian improvements include:

- Installing Pedestrian Hybrid Beacons on 3rd Street on the south side of Bay Street and on 3rd Street on the south side of 15th Avenue N.
- Milling, resurfacing and restriping approximately 60 to 120 feet of pavement at each location.
- Providing crosswalk refuge points for pedestrians in the medians and bulb outs at crosswalks to prevent vehicles from parking in crosswalks.
- Installing additional lighting and drainage.

Contractor: American Lighting and Signalization, Inc. ♦ Cost: \$1.9 million
Construction start: January 3, 2022 ♦ Estimated completion: Fall 2022
Contact: Sara Pleasants, sara.pleasants@dot.state.fl.us or (904) 360-5480