




FIN 428271-2

HYBRID CONSTRUCTION OPEN HOUSE

State Road A1A from Bridge of Lions to
Charlotte Street Seawall Replacement

St. Johns County, Florida

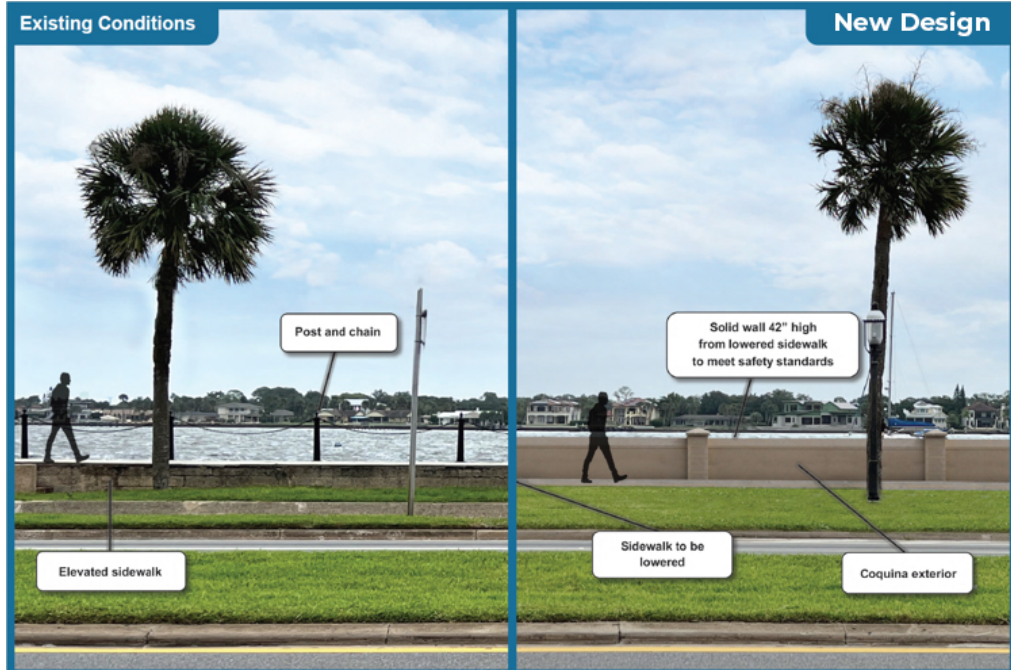

Construction starts: Mid 2026
Construction ends: Late 2027

Contractor: Hal Jones (Vecellio & Grogan)
Cost: \$19.9 million

The existing seawall along State Road A1A from the Bridge of Lions to Charlotte street in historic downtown St. Augustine, constructed in the early 1960s, is experiencing extensive deterioration and has reached the end of its service life. This project aims to replace the seawall while enhancing storm protection, improving pedestrian safety and access while maintaining the aesthetics of the area.

The improvements as part of this project consist of replacing 1,600 linear feet of seawall, lowering the existing promenade, replacing existing post and chain barrier with a solid 42" tall coquina exterior solid pedestrian barrier and removal and reconstruction of timber pergolas within the project limits. Construction work zone will extend from the on-street parking to the waterfront. Construction is planned in phases from south to north, mainly by barge. Pedestrian detours to be installed during construction. All demolition activities will take place during the day.

**Questions? Contact Renata DiGregorio at (904) 360-5484 or Renata.DiGregorio@dot.state.fl.us.
For additional project information, visit www.nflroads.com.**